

LED FLOOD LIGHT *ARES series*



**160LM/W
LED**

IP65

Feel The New Space !!

- We are committed to providing you with newest and technologically advanced concepts available. We produce the most energy-efficient, money saving, providing you with the newest LED lighting the market !
- We are proud to offer you our exclusive, Super-High Brightness, 160 LM/W LED Flood Light fixture !
- Best Energy Efficiency, Best Quality, GUARANTEED LOWEST PRICE !



FEATURES

160 LM/W LED

UNIQUE SMD PACKAGE

75W=120W Bridgelux normal led floodlight

95W=160W Bridgelux normal led floodlight

135W=220W Bridgelux normal led floodlight

Professional Enterprise Quality at an UNBEATABLE PRICE!

**Equipped with toughened glass,
good retraction performance and more safety**



IP65



LM-79
LM-80



Energy-saving 60%



IP65

Equipped with the famous, UL approved, "MEANWELL" driver.

Safer, longer operating life, Higher efficiency rating



TOUGHENED GLASS

- With high light transmission
- Unbreakable and more safety

IP67 AIR PRESSURE REGULATOR

- Anti UV and inflaming retarding.
- Regulate the pressure Effectively.
- The product vertical structure is water - proofing and dust - proofing.



LED Lighting Designs Australia Pty Ltd

Address: 1/13 Watson Rd Padstow 2211 NSW. Phone: (0

Website: www.ledlightingdesigns.com.au


Email: info@ledlightingdesigns.com.au

160 LM/W LEDS

- High-brightness SMD with unique designed



GOOD HEAT DISSIPATION TECHNIQUES

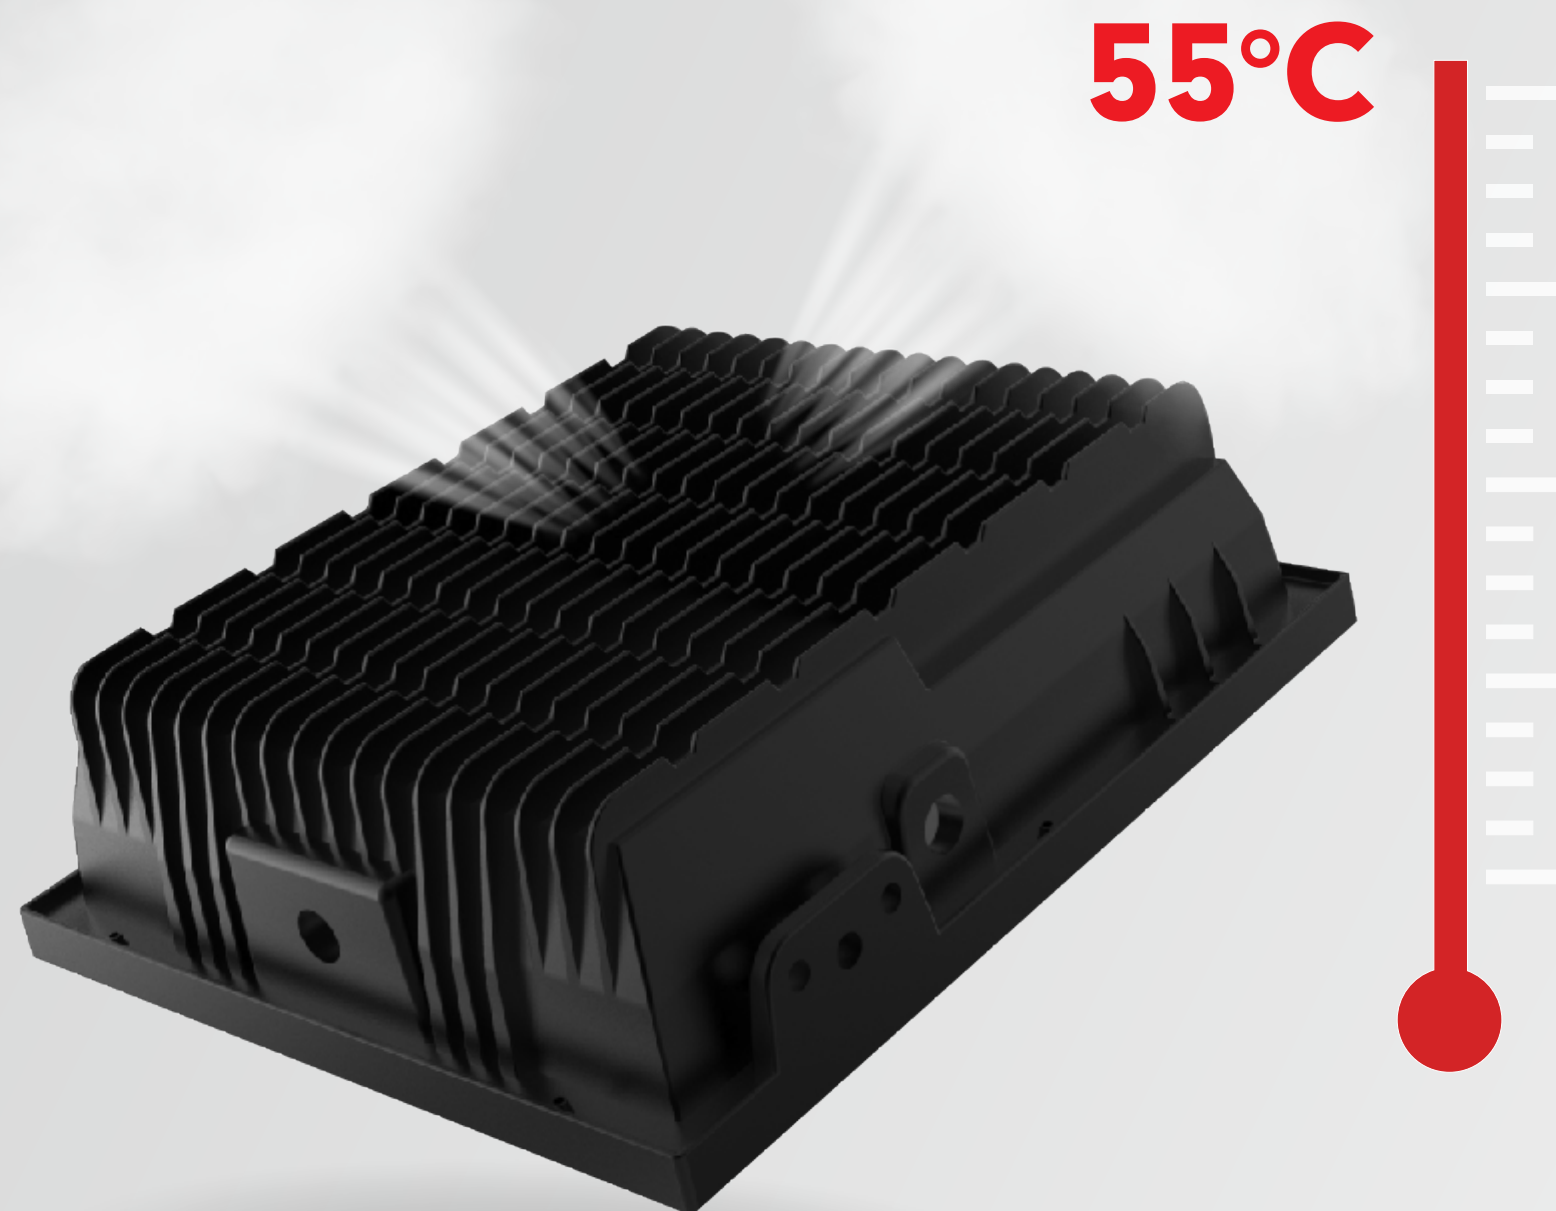

Our radiator is specifically designed with special material that dissipates an enormous amount of heat very quickly.


The radiator controls the temperature of lamp, under **55°C** through heat conduction, heat convection, heat radiation. It allows the LED chips to achieve its highest performance, lower light decay, and long-lifespan.

SPECIFICATION




Model	Power	Voltage	Power factor	Light color	Luminous	CCT	CRI	D	W	H
LLD-CFS75W	75W	100-240V	>0.95	Warm white	11250 LM	2700-3300K	75	251mm	122mm	269mm
				Pure white	11625 LM	3800-4600k				
				Cool white	11850 LM	5500-6500K				
LLD-CFS95W	95W	100-240V	>0.95	Warm white	14250 LM	2700-3300K	75	255mm	123mm	354mm
				Pure white	14725 LM	3800-4600k				
				Cool white	15010 LM	5500-6500K				
LLD-CFS135W	135W	100-240V	>0.95	Warm white	20250 LM	2700-3300K	75	294mm	144mm	433mm
				Pure white	20925 LM	3800-4600k				
				Cool white	21330 LM	5500-6500K				


75W

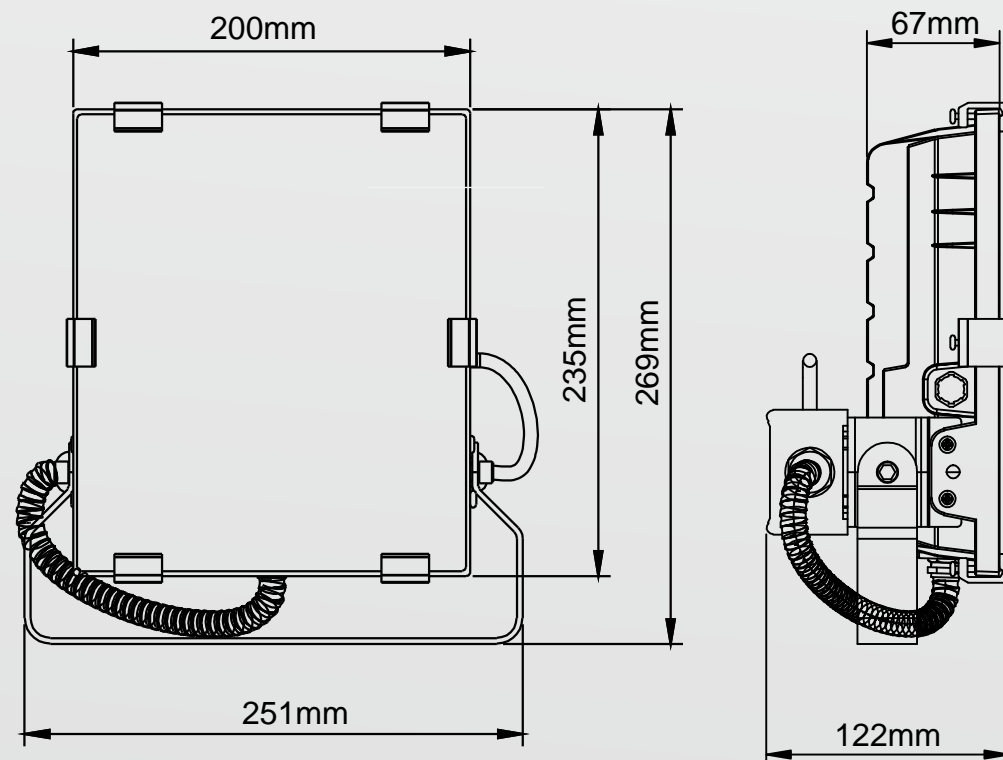


95W

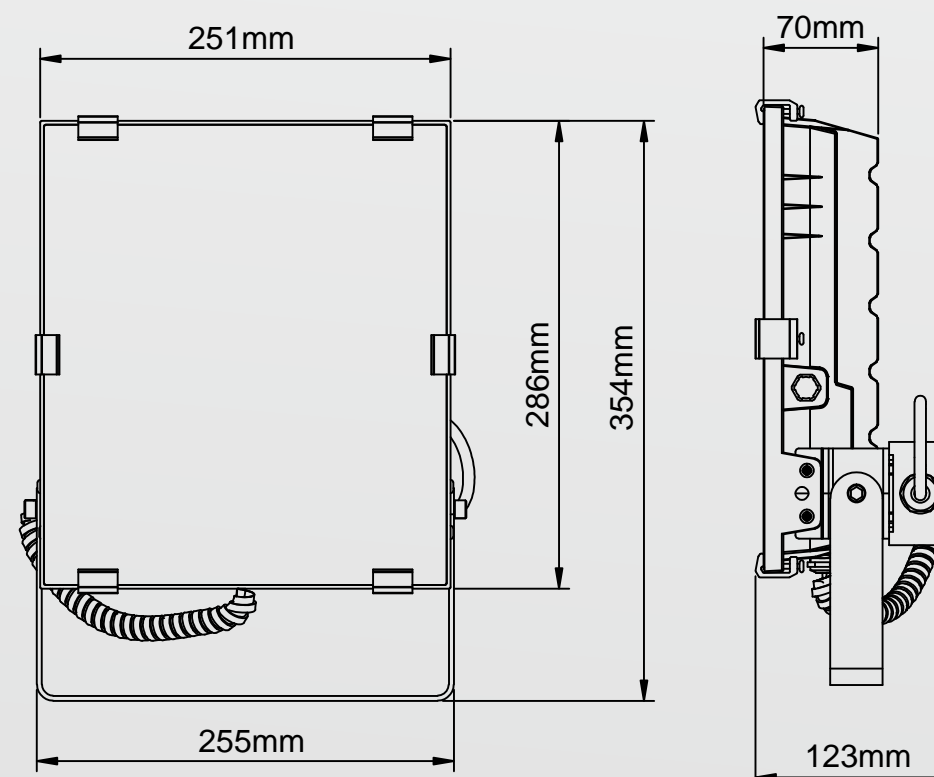


135W

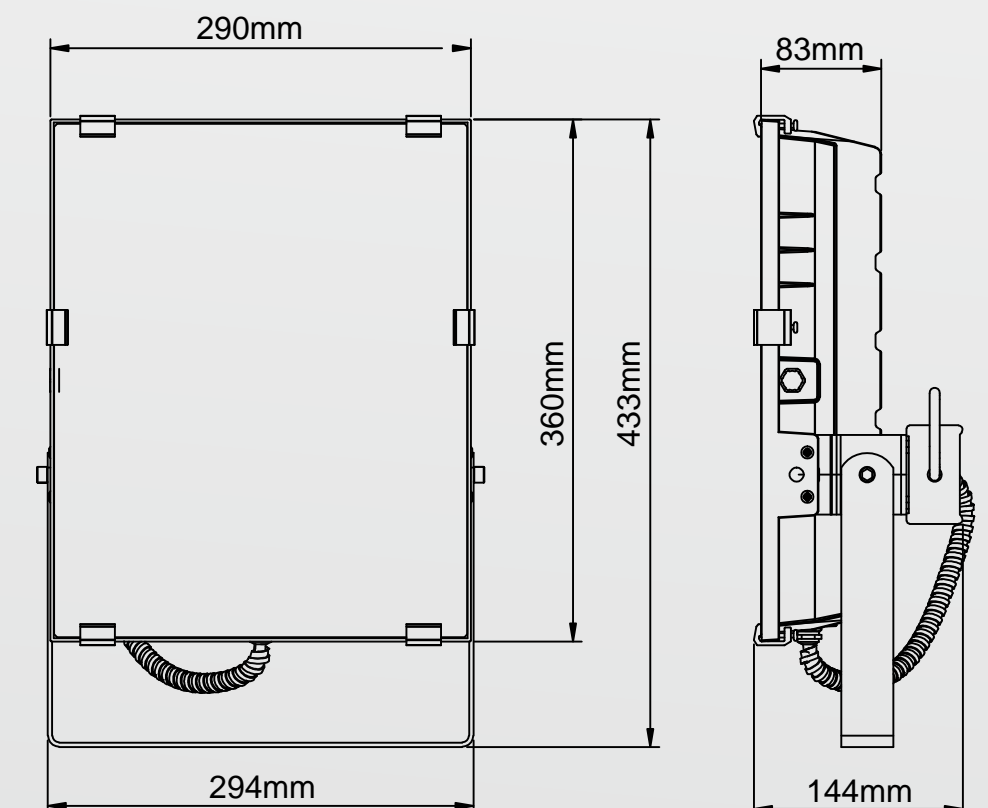


75W

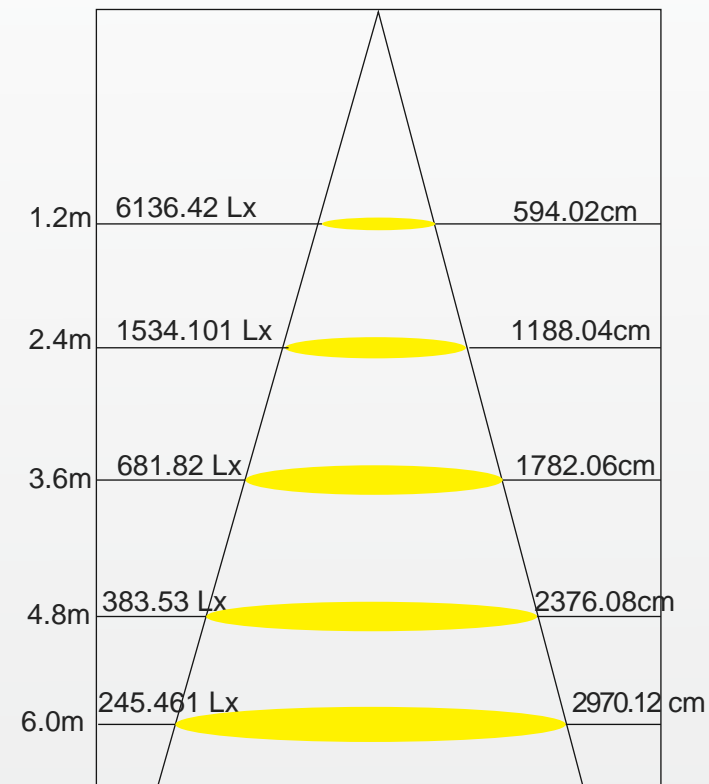

95W

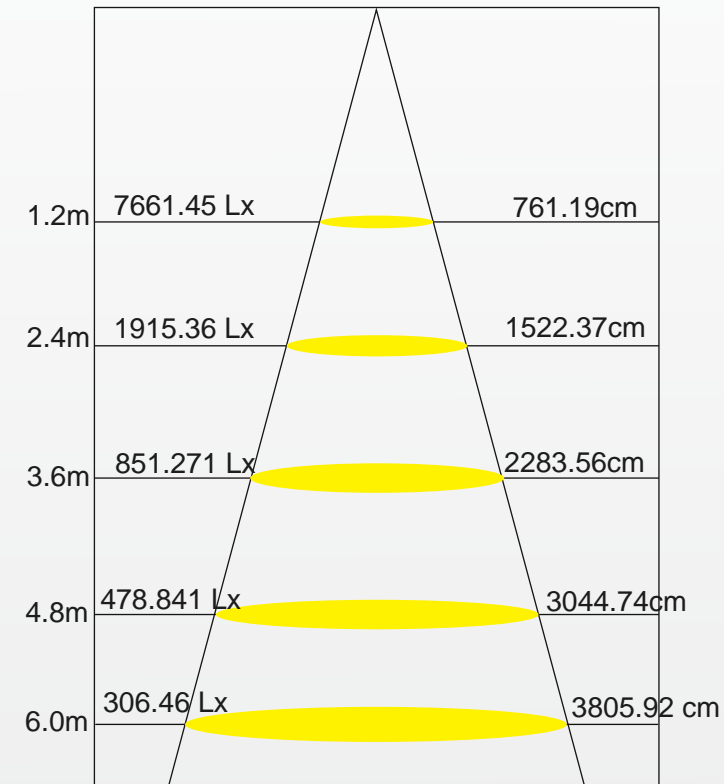

135W

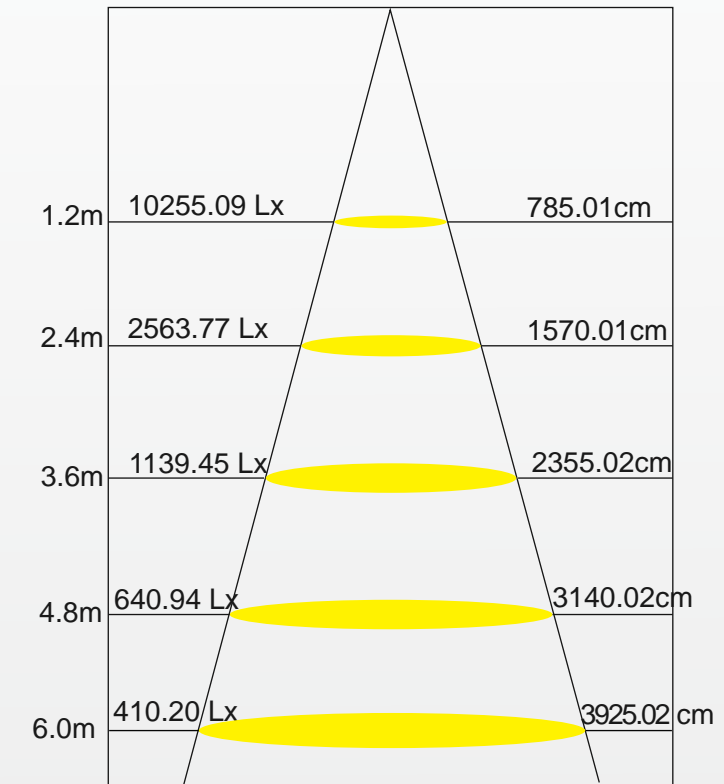

APPLICATIONS:

- Advertising Board
- Highway
- Public Square
- Building
- Bridge

