



LED Low Bay Canopy Light

60W / 100W / 150W

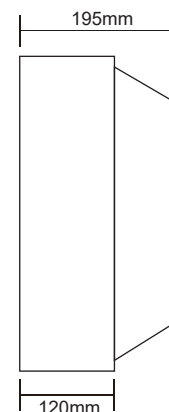


Certificates

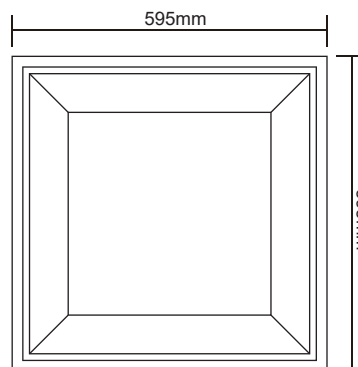

Application

Suitable for food processing and packing areas, service station canopies, car parks, retail areas, shopping malls and manufacturing facilities

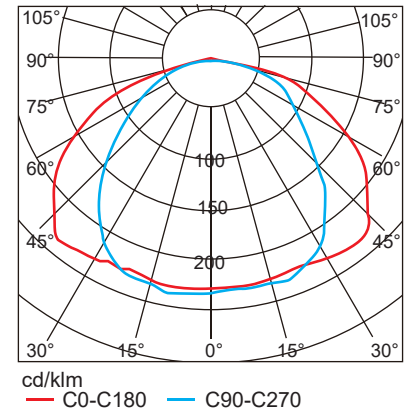

Technical Specification

Item	LLD-CL60W	LLD-CL100W	LLD-CL150W
Dimension	595*595*195 mm	595*595*195 mm	595*595*195 mm
Voltage	AC85V- 265V~50/60HZ		
Power	60W	100W	150W
LED Type	Philips3030		
LED Driver	MEANWELL / SOSEN		
Lumen (±10%)	7200lm	12000lm	18000lm
Color Temperature (CCT)	2700K-6500K		
Beam Angel	120°		
Color Rendering Index (CRI)	Ra >80		
Power Supply Efficiency	>95%		
LED Luminous Efficiency	120lm/W		
Power Factor (PF)	>0.95		
Total Harmonic Distortion (THD)	≤15%		
IP Rank	IP 65		
Certificate	C-TICK, SAA, CE, CB		
Material	PC+AL		
Box Size	610x610x210mm		