



CONSERVER

For a lighter, brighter future

SPEC SHEET: 540mm & 1140mm LED Slimline Linkable Batten TRI

CONSTRUCTION

- Select colour temperature with DIP switch
- Polycarbonate body
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Built-in constant current non-dimmable LED driver
- Double insulation
- 1.2 m flex & 2 pin plug
- Mounting brackets and connectors (Straight & 10 cm flexible) included

IP RATING


- IP20 suitable for interior use only



TECHNICAL SPECIFICATION

Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
240V	9W	750lm/800lm/750lm	3000K/4000K/5000K	105°	>80	White
240V	18W	1550lm/1600lm/1600lm	3000K/4000K/5000K	105°	>80	White

DIMENSIONS

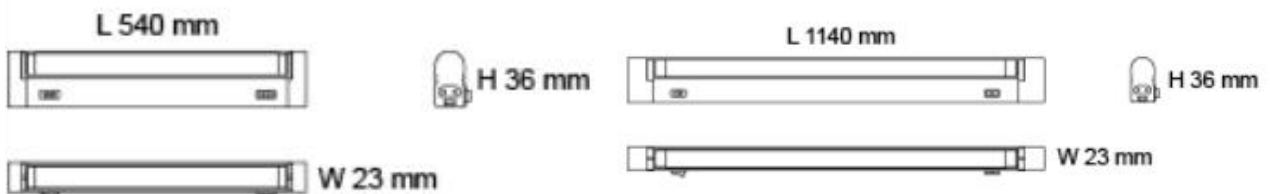

Commercial Lighting Designs

TEL:02-80143897 Fax:02-87640606 Email:info@commerciallightingdesigns.com.au