




APPLICATION

Suitable for residential commercial and industrial applications,, such as schools, car parks, security purposes, public buildings and garages.

SPECIFICATION

- Circular LED Strip 24W 6000K
- High performance battery for Emergency
- Acrylic Diffuser
- Light output comparable to 40W T8
- Pressed Steel Casing

DIMENSIONS

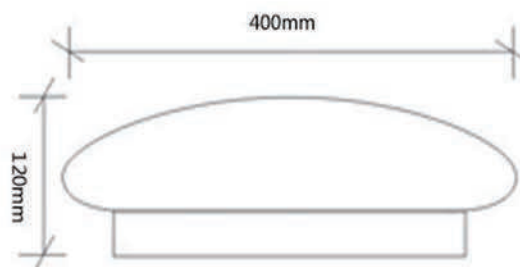

SENSOR OPTION

Intergrated microwave motion sensor



Model No.	Input Voltage	Led Lamp	Lifetime (hrrs)
RL-OST40-24WLED-EMG	240V	24W	20000hrs
Max Ambient Temperature	Colour	CCT L100 (K)	CRI at L100
40 C	White	6000K	85
Operation Mode	Charge Time	Operation Duration	Lumens (lm)
Maintained	48hrs	2hrs	2000lm
Power Factor	Comparable to	Diameter (mm)	Height (mm)
>0.85	40W T8	400mm	120mm

* Specifications above are for reference only and may vary without prior notice.