


# LED Downlight-A

## Technical Specifications

Material	Plastic and aluminum
Housing Color	White/Silver
CCT	3000K/4000K/5000K/6000K
Input Voltage	AC200-240V
PF	0.89-0.92
Efficiency	90lm/W
Light source	Epistar SMD 2835
IP rate	IP44
Warranty	3years
Life span	50,000H
Certificates	SAA , C-Tick,CE,RoHS




## Dimension

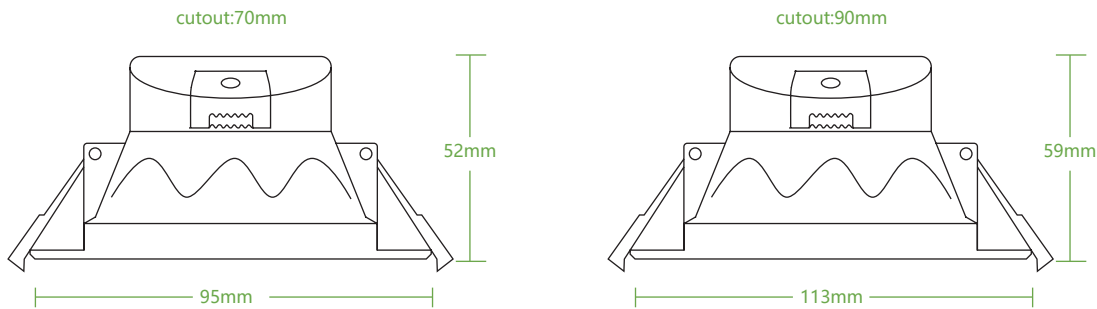

Model NO.	Wattage	Voltage	CRI	Beam Angle	CCT	Lumens	Ceiling cut-out
LLD-5W-A LLD-5W-ACCT	5W	AC220-240V	>80	110°	3000K/4000K/5000K	450lm±5%	70mm
LLD-6W-A LLD-6W-ACCT	6W	AC220-240V	>80	110°	3000K/4000K/5000K	540lm±5%	70mm
LLD-7W-A LLD-7W-ACCT	7W	AC220-240V	>80	110°	3000K/4000K/5000K	630lm±5%	70mm
LLD-8W-A LLD-8W-ACCT	8W	AC220-240V	>80	110°	3000K/4000K/5000K	720lm±5%	90mm
LLD-9W-A LLD-9W-ACCT	9W	AC220-240V	>80	110°	3000K/4000K/5000K	810lm±5%	90mm
LLD-10W-A LLD-10W-ACCT	10W	AC220-240V	>80	110°	3000K/4000K/5000K	900lm±5%	90mm

## Installation Schematic Diagram: Dimmer Lamp

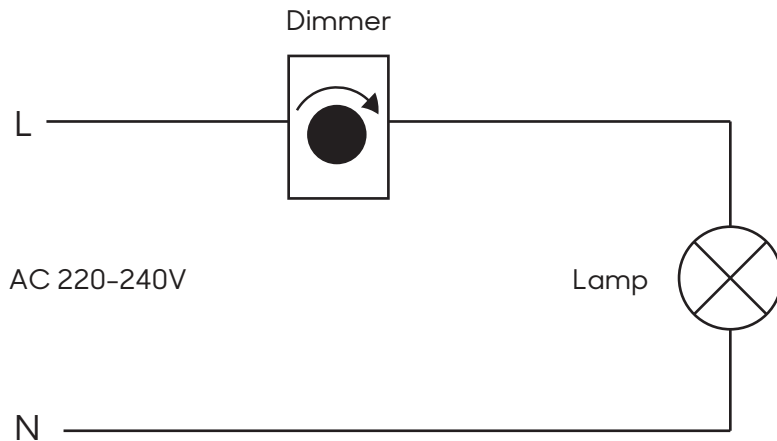

### Note:

- 1、 Don't take the LED lamp apart
- 2、 Only indoor used
- 3、 The LED lamp must work under the right voltage according to the specific1ation
- 4、 Application in enclosed fixtures may speeds up lumen depreclation and shorten lamp life
- 5、 Lamp not suitable for use under dust and moisture.

