


## APPLICATION

Suitable for residential commercial and industrial applications, such as schools, car parks, security purposes, public buildings and garages.

## SPECIFICATION

- High efficiency T8 LED Tubes
- Metal Wireguard Cage
- Suitable for surface or pendant mount
- High Performance Ni-MH Battery 4.8V
- Emergency DC Power: 1.7W
- Emergency Output Lumen: 140lm
- **Classification:** D25
- **Charge Time:** 16hrs
- **Emergency Duration:** 2hrs

## DIMENSIONS

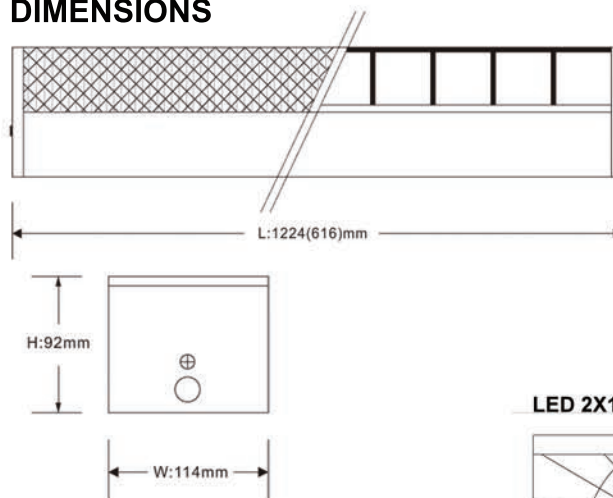


## SENSOR OPTION

Intergraded microwave motion sensor



## LED 2X18W

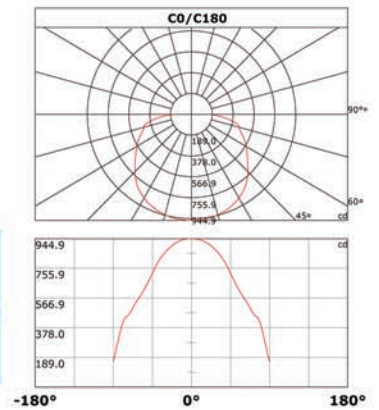

Model No.	Input	Power	Lumen	Battery Type	CCT	Classification	Dimensions LXWXH
RL-SFD25-W218LED	240V	2 X 18W	2 X 1600lm	Ni-MH 4.8V 1.8Ah	4000/6500K	D25	1224 X 114 X 92 mm
RL-SFD25-W118LED-WB	240V	1 X 18W	1 X 1600lm	Ni-MH 4.8V 1.8Ah	4000/6500K	D25	1224 X 114 X 92 mm
RL-SFD25-W29LED	240V	2 X 9W	2 X 800lm	Ni-MH 4.8V 1.8Ah	4000/6500K	D25	616 X 114 X 92 mm
RL-SFD25-W19LED-WB	240V	1 X 9W	1 X 800lm	Ni-MH 4.8V 1.8Ah	4000/6500K	D25	616 X 114 X 92 mm

\* Specifications above are for reference only and may vary without prior notice.