

LED SHOP LIGHT

S9520 SEYMOUR, S9530 MANSFIELD

DIMENSIONS


S9520

L x W: 165 x 165 mm

H 164 mm



W 189 mm




L 189 mm


S9530

L x W: 165 x 165 mm

H 178 mm



W 189 mm



L 189 mm


S9520/2

L x W: 335 x 165 mm

H 164 mm



W 189 mm




L 361 mm


S9530/2

L x W: 335 x 165 mm

H 178 mm



W 189 mm



L 361 mm


S9520/3

L x W: 480 x 165 mm

H 164 mm



W 189 mm



L 513 mm


S9530/3

L x W: 480 x 165 mm



H 178 mm



W 189 mm



L 513 mm

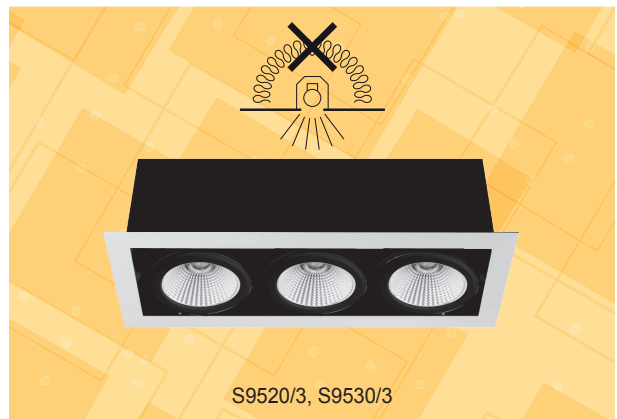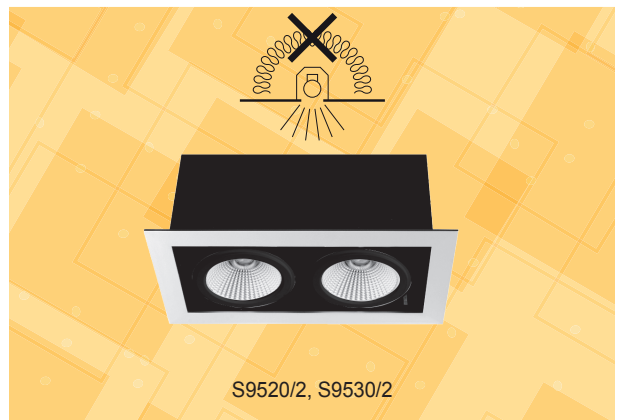


PHOTOMETRIC DATA

Unit:cd

S9520/1700 WW

C0/C180

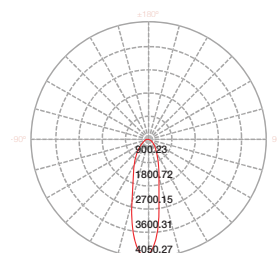

Commercial Lighting Designs
 Website: commerciallightingdesigns.com.au
 Email: info@commerciallightingdesigns.com.au
 Phone: 02 8014 3897

CONSTRUCTION

- Pressed steel casing
- Powder coated finish
- LED AR111 module(s) & driver(s) included
- High output COB LED chip
- Specially designed optical lens
- Changeable multi-reflector system
- 1.2 m flex & 3 pin plug fitted

IP RATING

- IP20 suitable for interior use only

BEAM ANGLE

- 24° (standard)
- AR111/1700: 40° (option)
- AR111/3500: 20°, 60° (option)

COLOUR TEMPERATURE

- 3000K Warm White (standard)
- AR111/1700: 4000K Cool White (standard)

DIMMING OPTIONS (AR111/1700, AR111/3500)

- 1-10V analogue
- DALI / DSI, digital



Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	Cut out size L x W	Dimensions L x W x H
S9520/700 SL	240V	12W	750lm	3000K	24°	>80	Yes*	Silver	165 x 165	189 x 189 x 164
S9520/2x700 SL	240V	2 x 12W	1500lm	3000K	24°	>80	Yes*	Silver	360 x 165	361 x 189 x 164
S9520/3x700 WH	240V	3 x 12W	2250lm	3000K	24°	>80	Yes*	White	480 x 165	513 x 189 x 164
S9520/3x700 SL	240V	3 x 12W	2250lm	3000K	24°	>80	Yes*	Silver	480 x 165	513 x 189 x 164
S9520/1700 SL	240V	20W	1600lm	3000K	24°	>80	Yes*	Silver	165 x 165	189 x 189 x 164
S9520/2x1700 SL	240V	2 x 20W	3200lm	3000K	24°	>80	Yes*	Silver	360 x 165	361 x 189 x 164
S9520/3x1700 WH	240V	3 x 20W	4800lm	3000K	24°	>80	Yes*	White	480 x 165	513 x 189 x 164
S9520/3x1700 SL	240V	3 x 20W	4800lm	3000K	24°	>80	Yes*	Silver	480 x 165	513 x 189 x 164

*Trailing edge dimming

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	Cut out size L x W	Dimensions L x W x H
S9530/700 WH	240V	12W	750lm	3000K	24°	>80	Yes*	White	165 x 165	189 x 189 x 178
S9530/700 SL	240V	12W	750lm	3000K	24°	>80	Yes*	Silver	165 x 165	189 x 189 x 178
S9530/1700 WH	240V	20W	1600lm	3000K	24°	>80	Yes*	White	165 x 165	189 x 189 x 178
S9530/1700 SL	240V	20W	1600lm	3000K	24°	>80	Yes*	Silver	165 x 165	189 x 189 x 178
S9530/2x700 WH	240V	2 x 12W	1500lm	3000K	24°	>80	Yes*	White	360 x 165	361 x 189 x 178
S9530/2x700 SL	240V	2 x 12W	1500lm	3000K	24°	>80	Yes*	Silver	360 x 165	361 x 189 x 178
S9530/2x1700 WH	240V	2 x 20W	3200lm	3000K	24°	>80	Yes*	White	360 x 165	361 x 189 x 178
S9530/2x1700 SL	240V	2 x 20W	3200lm	3000K	24°	>80	Yes*	Silver	360 x 165	361 x 189 x 178
S9530/3x700 WH	240V	3 x 12W	2250lm	3000K	24°	>80	Yes*	White	480 x 165	513 x 189 x 178
S9530/3x700 SL	240V	3 x 12W	2250lm	3000K	24°	>80	Yes*	Silver	480 x 165	513 x 189 x 178
S9530/3x1700 WH	240V	3 x 20W	4800lm	3000K	24°	>80	Yes*	White	480 x 165	513 x 189 x 178
S9530/3x1700 SL	240V	3 x 20W	4800lm	3000K	24°	>80	Yes*	Silver	480 x 165	513 x 189 x 178
S9530/3500 WH	240V	35W	3300lm	3000K	40°	>80	No	White	165 x 165	189 x 189 x 178
S9530/3500 SL	240V	35W	3300lm	3000K	40°	>80	No	Silver	165 x 165	189 x 189 x 178
S9530/2x3500 WH	240V	2 x 35W	6600lm	3000K	40°	>80	No	White	360 x 165	361 x 189 x 178
S9530/2x3500 SL	240V	2 x 35W	6600lm	3000K	40°	>80	No	Silver	360 x 165	361 x 189 x 178
S9530/3x3500 WH	240V	3 x 35W	9900lm	3000K	40°	>80	No	White	480 x 165	513 x 189 x 178
S9530/3x3500 SL	240V	3 x 35W	9900lm	3000K	40°	>80	No	Silver	480 x 165	513 x 189 x 178

*Trailing edge dimming

Commercial Lighting Designs
 Website: commerciallightingdesigns.com.au
 Email: info@commerciallightingdesigns.com.au
 Phone: 02 8014 3897