

SURFACE MOUNTED LED DOWNLIGHT

S9603 COLUMN

CONSTRUCTION

- 3 size options
- Surface mounted downlight with no-screw outside fitting providing a much cleaner design
- Die Cast Aluminium body
- Powder coated finish
- Deep recessed angle fitting enables good glare control and light effect
- High output COB LED chip
- Changeable multi-reflector system
- Built-in constant current non-dimmable LED driver



IP RATING

- IP20 suitable for interior use only


FITTING COLOUR

- Matt white (standard)
- Black, Silver (option)

BEAM ANGLE

- 30° (standard)
- S9603/80: 10°, 20°, 40°, 50° (option)
- S9603/110, S9603/150: 10°, 20°, 40°, 70° (option)

DIMENSIONS

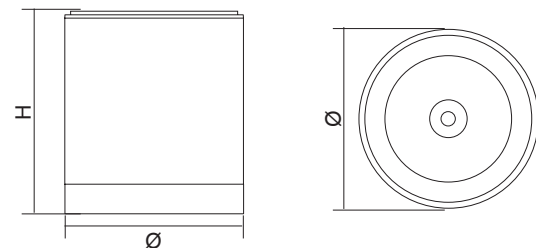

COLOUR TEMPERATURE

- 4000K Cool White (standard)
- 3000K Warm White (option)
- 5000K Neutral Daylight (option)

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	Dimensions Ø x H
S9603/80/15CW	240V	13W	1500lm	4000K	30°	>80	Matt White	80 x 126 mm
S9603/80/20CW	240V	20W	2000lm	4000K	30°	>80	Matt White	80 x 126 mm
S9603/110/25CW	240V	18W	2500lm	4000K	30°	>80	Matt White	110 x 148 mm
S9603/110/34CW	240V	28W	3400lm	4000K	30°	>80	Matt White	110 x 148 mm
S9603/150/42CW	240V	34W	4200lm	4000K	30°	>80	Matt White	150 x 171 mm
S9603/150/49CW	240V	38W	4900lm	4000K	30°	>80	Matt White	150 x 171 mm
S9603/150/62CW	240V	52W	6200lm	4000K	30°	>80	Matt White	150 x 171 mm

PHOTOMETRIC DATA

UNIT: cd C0/C180 ——— C90/C270 ———

