

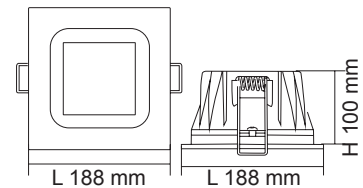

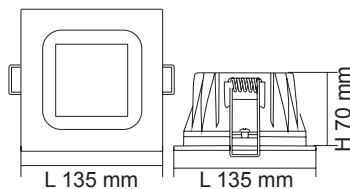



LED SQUARE DOWNLIGHT

S9651 PUNNET

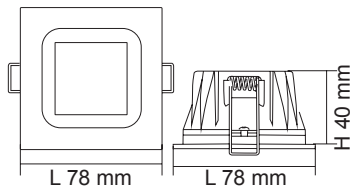

DIMENSIONS



CONSTRUCTION

- Square bezel combined with round body to suit round cut out
- Deep recessed angle fitting enables good glare control and light effect
- Die Cast Aluminium body
- Matt powder coated finish
- High efficiency SMD LED chips
- High efficiency prismatic diffuser
- Constant current non-dimmable LED driver fitted
- Trailing edge dimmable models available
- 1.2 m flex & 2 pin plug fitted

IP RATING

- IP44 weatherproof front only

COLOUR TEMPERATURE

- 4000K Cool White (standard)
- 3000K Warm White (option)
- 5000K Neutral Daylight (option)

DIMMING OPTIONS

- Trailing edge (excluding S9651/175CW/WH50W)
- 1-10V analogue
- DALI / DSI, digital




| Model No. | Input | Power | Lumen | CCT | Beam Angle | CRI | Dimmable | Fitting Colour |
|--------------------------|-------|-------|--------|-------|------------|-----|----------|----------------|
| S9651/70CW/WH7W | 240V | 7W | 800lm | 4000K | 80° | >80 | Yes* | Matt White |
| S9651/70CW/WH10W | 240V | 10W | 1000lm | 4000K | 80° | >80 | Yes* | Matt White |
| S9651/125CW/WH20W | 240V | 20W | 2000lm | 4000K | 80° | >80 | No | Matt White |
| S9651/125CW/WH30W | 240V | 30W | 2800lm | 4000K | 80° | >80 | No | Matt White |
| S9651/175CW/WH35W | 240V | 35W | 3500lm | 4000K | 80° | >80 | No | Matt White |
| S9651/175CW/WH50W | 240V | 50W | 4800lm | 4000K | 80° | >80 | No | Matt White |


* Trailing edge dimming

PHOTOMETRIC DATA Unit: cd C0/C180 _____


S9651/70CW/WH7W



S9651/125CW/WH20W



S9651/175CW/WH35W

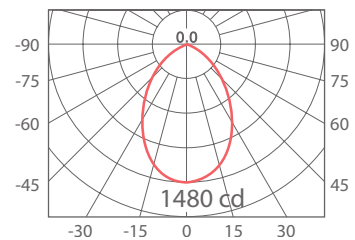

Commercial Lighting Designs
 Website: commerciallightingdesigns.com.au
 Email: info@commerciallightingdesigns.com.au
 Phone: 02 8014 3897