

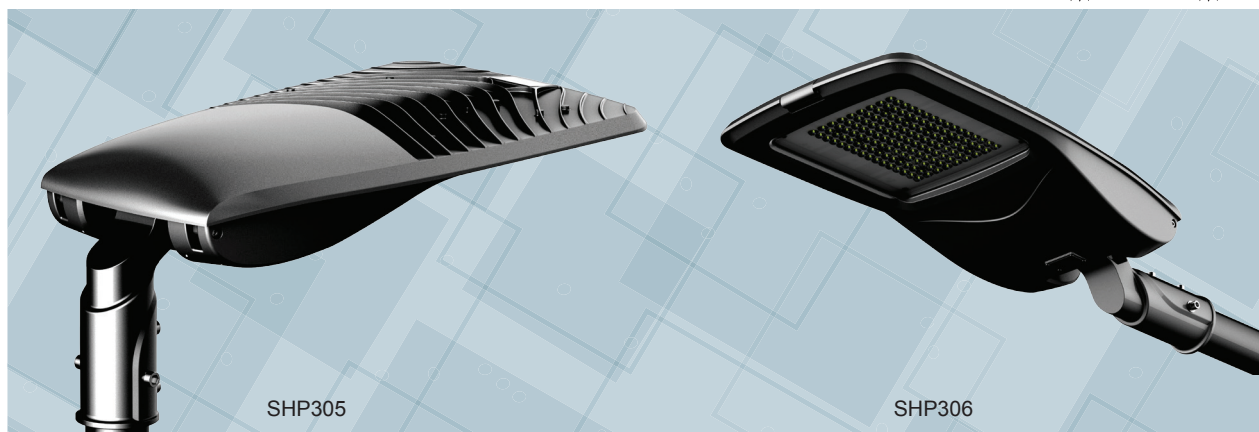
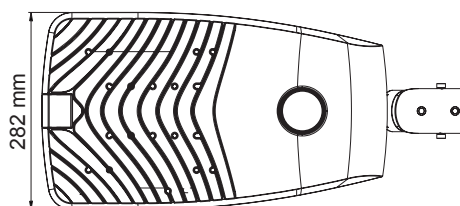
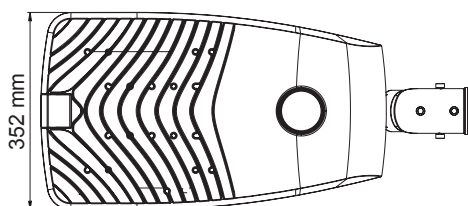


LED STREET LIGHT

SHP305, SHP306 DRIVE



DIMENSIONS



CONSTRUCTION

- Die-cast aluminium body
- Powder coated finish
- Clear tempered glass diffuser
- Built-in surge protection device (10KV) for extra safety operation
- High efficiency SMD LED chips
- Built-in 3-in-1 dimming function LED driver fitted (1-10VDC, PWM signal & resistance)
- High efficiency heat dissipation, light weight heatsink
- Asymmetrical light distribution (TYPE II) fitted
- 0% upward light ratio
- Standard 3G.ANSI C.136.31-2010 Ø 60 pole mounting bracket
- 800 mm 3 core rubber flex

IP RATING

- IP66 weatherproof

COLOUR TEMPERATURE

- 4000K Cool White (standard)
- 3000K Warm White (option)
- 6000K Daylight (option)

DIMMING OPTIONS


- SMART timer dimming

LENS OPTIONS (Refer to Photometric data below)

- SHP305A75/P (standard)
- SHP305A45/P (option)
- SHP306A45/P (standard)
- SHP306A75/P (option)

ACCESSORIES OPTION

- Photocell sensor



TYPE II


Commercial Lighting Designs
 Website: commerciallightingdesigns.com.au
 Email: info@commerciallightingdesigns.com.au
 Phone: 02 8014 3897




| Model No. | Input | Power | Lumen | CCT | CRI | Fitting Colour | Net Weight |
|-----------------|-------|-------|---------|-------|-----|----------------|------------|
| SHP305/70CW/BK | 240V | 70W | 120lm/W | 4000K | >70 | Black | 9.2 kg |
| SHP305/90CW/BK | 240V | 90W | 120lm/W | 4000K | >70 | Black | 9.2 kg |
| SHP305/120CW/BK | 240V | 120W | 120lm/W | 4000K | >70 | Black | 9.2 kg |
| SHP305/150CW/BK | 240V | 150W | 120lm/W | 4000K | >70 | Black | 9.2 kg |
| SHP305/180CW/BK | 240V | 180W | 120lm/W | 4000K | >70 | Black | 9.2 kg |
| SHP306/30CW/BK | 240V | 30W | 120lm/W | 4000K | >70 | Black | 6.8 kg |
| SHP306/50CW/BK | 240V | 50W | 120lm/W | 4000K | >70 | Black | 6.8 kg |
| SHP306/70CW/BK | 240V | 70W | 120lm/W | 4000K | >70 | Black | 6.8 kg |
| SHP306/90CW/BK | 240V | 90W | 120lm/W | 4000K | >70 | Black | 6.8 kg |

PHOTOMETRIC DATA UNIT: cd, C0/C180 — C90/270 —


SHP305A75/P




SHP305A45/P



SHP306A45/P



SHP306A75/P



Commercial Lighting Designs
 Website: commerciallightingdesigns.com.au
 Email: info@commerciallightingdesigns.com.au
 Phone: 02 8014 3897