




Trunking Light Strip

Asymmetrical Light Distribution

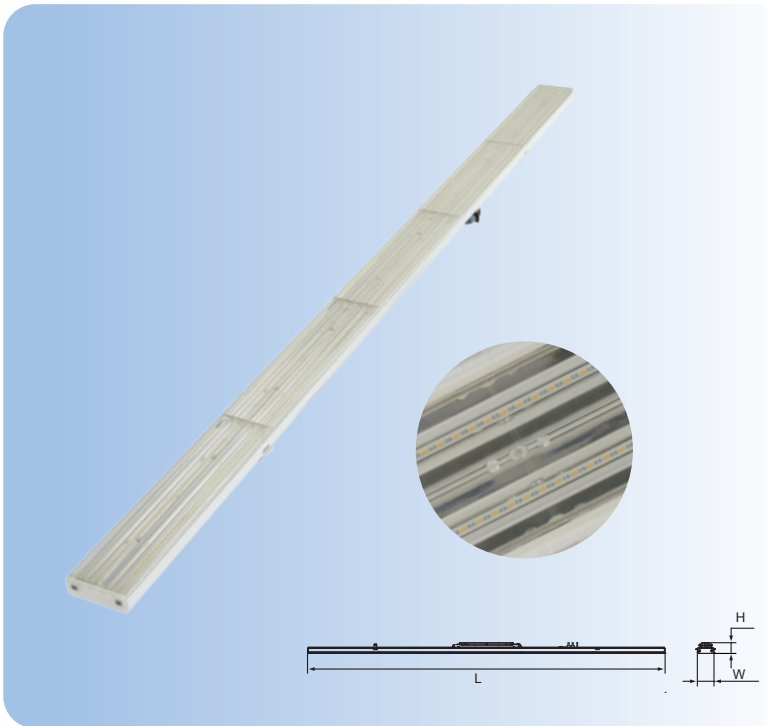

FEATURES

- Super high efficiency, up to 160lm/W
- No flicker, flicker≤5%
- 1.0mm thickness extruded aluminum frame, powder coated housing
- High transparency polycarbonate lens
- Continuous and seamless connection with mounting rail connector accessory
- Extremely innovative design, spring clamps and axial connectors make trunking light modules simply easy to connect with mounting rails
- Finishes: White
- Pre-wired: 5 wires, 7wires and 9 wires with wiring diameter 1.5mm² or 2.5mm² are optional

INCLUDES

- Constant current LED driver

WARRANTY

- Five years (subject to terms and conditions)

CERTIFICATION	IP RATING	DIMMABLE	Ra	DISTRIBUTION	
	IP20	Non dim	Ra≥80	44W Double asymmetrical	44W Right asymmetrical

Part No.	Model No.	Voltage	Watt.	PF	Color Temp.	Lumens	Beam Angle	Lifetime L70B50	Size (L*W*H)mm	Net Weight (kg)
403013	ECTLA1A-L150 28W	220-240V	28W	0.9	3000K	4050lm	Double asymmetrical	50000h	1482*69*45	1.95
403014	ECTLA1A-L150 28W	220-240V	28W	0.9	4000K	4500lm	Double asymmetrical	50000h	1482*69*45	1.95
403023	ECTLA1A-L150 44W	220-240V	44W	0.9	3000K	6300lm	Double asymmetrical	50000h	1482*69*45	1.95
403024	ECTLA1A-L150 44W	220-240V	44W	0.9	4000K	7000lm	Double asymmetrical	50000h	1482*69*45	1.95
403033	ECTLA1F-L150 28W	220-240V	28W	0.9	3000K	4050lm	asymmetrical	50000h	1482*69*45	1.75
403034	ECTLA1F-L150 28W	220-240V	28W	0.9	4000K	4500lm	asymmetrical	50000h	1482*69*45	1.75
403043	ECTLA1F-L150 44W	220-240V	44W	0.9	3000K	6300lm	asymmetrical	50000h	1482*69*45	1.75
403044	ECTLA1F-L150 44W	220-240V	44W	0.9	4000K	7000lm	asymmetrical	50000h	1482*69*45	1.75

- [1] Operating Frequency=50/60Hz;
 [2] Operating Temperature:-20 °C~+45 °C ;
 [3] Dali Dimming and 0-10V Dimming are available;
 [4] Optional with mounting rail and suspension kit
 *VEET and IPART are applying