


LED DOWNLIGHT

S9074TC, S9075TC, S9076TC PREMIER



DIMENSIONS

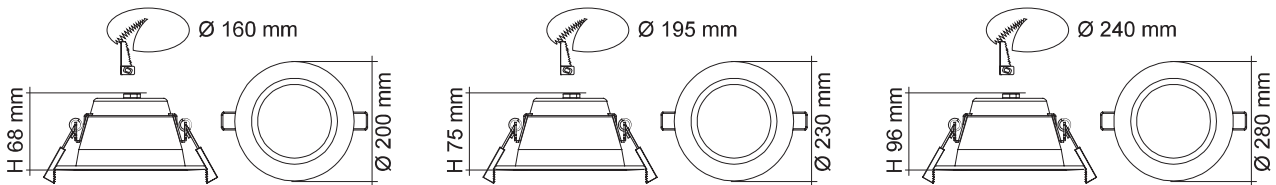

CONSTRUCTION

- Premium aluminium body
- Powder coated finish
- Opal acrylic diffuser
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver fitted
- 1.2m flex & plug fitted

IP RATING

- IP64 weatherproof front only


DIMMING OPTIONS

- Trailing edge (S9074 & S9075)
- 1-10V analogue
- DALI / DSI, digital


Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
S9074TC WH	240V	20W	1600lm/1800lm/1800lm	3000K/4000K/5700K	90°	>80	No	White
S9075TC WH	240V	30W	2600lm/2800lm/2800lm	3000K/4000K/5700K	90°	>80	No	White
S9076TC WH	240V	40W	3600lm/3900lm/3900lm	3000K/4000K/5700K	90°	>80	No	White

PHOTOMETRIC DATA (AT CCT 4000K) Unit: cd C0/C180 — C90/C270 —

S9074TC at 4000K

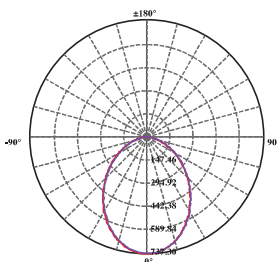

S9075TC at 4000K

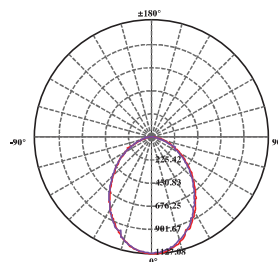

S9076TC at 4000K

